

# DYNATEK

## PH-1


### 2K-I PROGRAMMING HARNESS

This is the bike side stub harness to be used with the DIPK-1 programming kit. Installation drawings are provided. Install per your application. The connector cap is to be used when programming harness is not in use to keep dirt and dust out.

- THIS KIT CONTAINS:
- 1 PROGRAMMING HARNESS
  - 1 CONNECTOR CAP
  - 1 #10 NON-INSULATED RING TERMINAL
  - 2 FEMALE QUICK DISCONNECT TERMINALS
  - 2 MALE QUICK DISCONNECT TERMINALS


#### TYPICAL SETUP DUAL-FIRE/DUAL-COIL WIRING DIAGRAM

RECOMMENDED COILS:  
DYNATEK PART NUMBER DC2-1  
OR DC5-1;  
(DC2-1 COILS SHOWN)

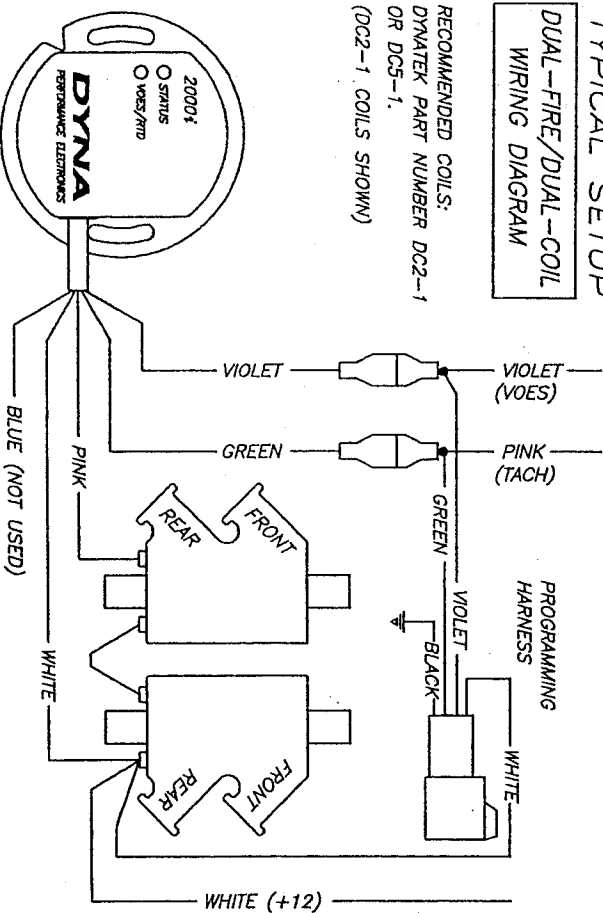

#### TYPICAL SETUP SINGLE-FIRE/DUAL-COIL WIRING DIAGRAM

RECOMMENDED COILS:  
DUAL PLUG: DYNATEK DC1-1  
OR DC1-2 MINIATURE COIL.  
SINGLE PLUG: DYNATEK DC3-1  
OR DC3-2 MINIATURE COIL.

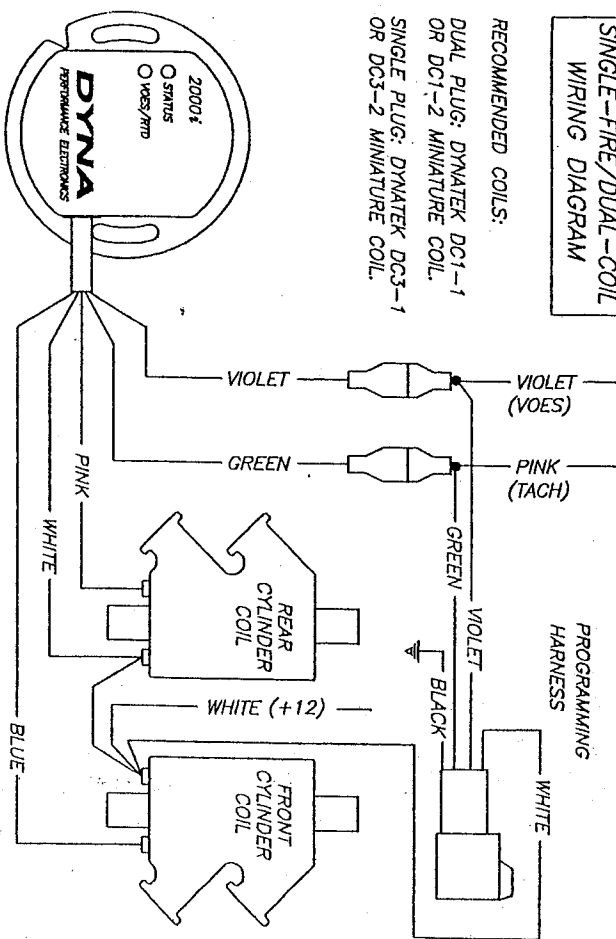

#### TYPICAL SETUP SINGLE-FIRE/SINGLE-COIL WIRING DIAGRAM

COIL:  
DYNATEK DC6-5 TWIN-FIRE II

NOTE:  
OUTPUTS CAN BE REVERSED  
FOR BEST SPARK PLUG WIRE  
ROUTING BY SWAPPING PINK  
AND BLUE PRIMARY  
CONNECTIONS.

